

Chilled Water Packaged Plant Room for Southampton Hospital

This chilled water treatment packaged plantroom was recently designed and built by Essco for Southampton Princess Anne Hospital neonatal unit.

We were delighted to supply this prefabricated packaged plant room for the neonatal intensive care unit in Southampton.

The purpose built, state of the art neonatal facility is designed to provide babies and their families with a bright, welcoming and spacious environment.



The plant room includes the following equipment, which was free issued to us for installation -

- Armstrong single head primary flow and primary return pumps
- 2000L chilled buffer vessel
- Combined pressurisation unit, degasser and water make up
- 80L expansion vessel
- 100mm dirt separator
- 12 4" fully lugged Essco butterfly valves



Chilled Water Packaged Plant Room for Southampton Hospital




The finished plant room measures 4.5m wide x 3.5m depth by 3.2m height.



4" fully lugged butterfly valves

Plant Room 3D Model

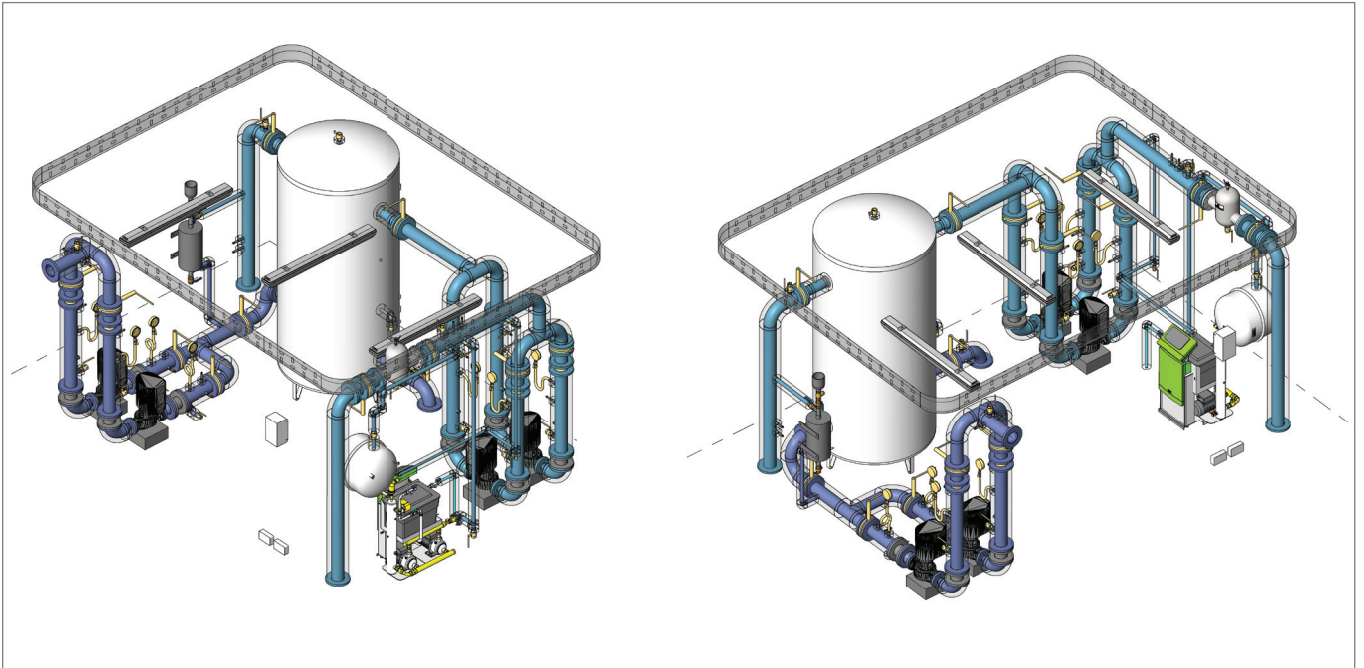

Find out how we can add value to your next project by contacting us on **01489 779068** or enquiries@esscoprefab.co.uk.