

EPV-FODRV

Fixed Orifice DRV, 15mm to 50mm, BSPP Thread

Features and Specification:



- Max working temperature: 120°C Min: -20°C
- Pressure class: DN15-50 PN16
- The measuring stations are used when measuring flow in heating, cooling and water supply system.
- The flow can be easily be measured after installation.
- Self-sealing measuring points.
- Possibility to close the valve to 0. For shut off function.



Dimension					
Model	Size	A	B	C	D
FODRV15	15	129	166	53	R 1/2"
FODRV20	20	134	174	56	R 3/4"
FODRV25	25	151	188	59	R1"
FODRV32	32	167	199	62	R1 1/4"
FODRV40	40	181	213	66	R1 1/2"
FODRV50	50	207	230	71	R2"

Technical Data	
Material	Dezincification resistance brass
Max closing pressure (kPa)	200 kPa
Min Pressure drop (kPa)	5 kPa
Pressure Class	PN16

Technical Data

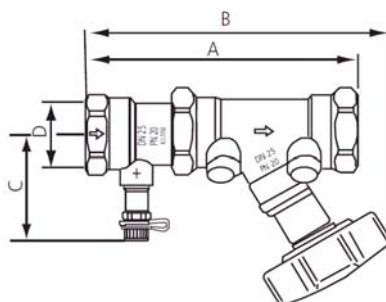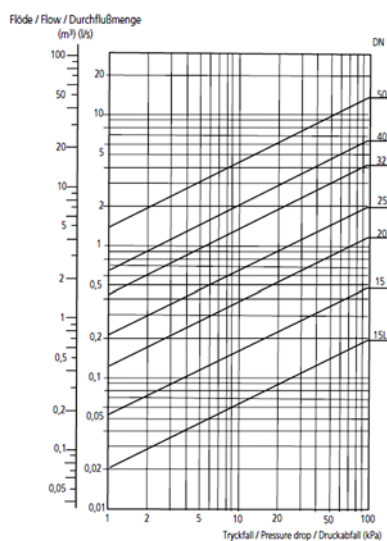

Please note: All information is sourced from manufacturer's data and is intended for guidance only — Essco Process Valves can accept no liability for changes, omissions or errors.

www.escogroup.co.uk - To order, call us on 01489 779 060 or email us on epvsales@escogroup.co.uk